



Color Variants

RW466364
Fully integrated, with glass door
Niche width 61 cm, Niche height 213.4 cm

Optional accessories

RA430000
Screw hole cover set. 8 pieces.
RA492660
Removable shelf with oak wood frame

Installation Accessories

RA420010
RA421611
Stainless steel door panel frame with handle
RA421612
Stainless steel door panel frame with handle
RA423140
Side trims, long.
RA425110
Handle bar, stainless steel, long
RA428611
Stainless steel door panel frame, handleless
RA460013
RA464611
Ventilation grille stainless steel

RW466364

Vario wine climate cabinet 400 series
Fully integrated, with glass door
Niche width 61 cm, Niche height 213.4 cm

3 independently controllable climate zones
Consistent temperatures with exact control from +5 °C to +20 °C
Humidity control
Stainless steel interior
Fully extendable bottle trays in oak wood and solid aluminium in anthracite
Bottle trays with hidden telescopic rails
Warm white and glare-free LED light spots
5 preset lighting scenarios, selectable via TFT display
Opening assist for door with two options: 1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle
Low-vibration operation
TFT touch display
Capacity 99 bottles

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Features

Capacity 99 bottles (based on 0.75l standard bottles).
12 bottle trays, - 9 fully extendable trays - 3 suitable for storage of Magnum bottles.
Flexible interior configuration possible by adding or removing fully extendable bottle trays.
Storage of up to 12 Magnum bottles with standard tray configuration (12 bottle trays).
Space for max. 12 bottle trays.
2 brilliant LED light spots with warm white, glare-free light in each climate zone.
5 different lighting scenarios can be selected for individual wine presentation.
Net volume 361 litres.

Consumption data

Energy consumption 171 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 73 kg.
The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 0.300 KW.
Connecting cable 3.0 m, detachable.

Characteristics

Built-in / Free-standing
Built-in
Door panel options
Not possible
Height (mm)
2125
Width of the product (mm)
603
Depth of the product
608
Required niche size for installation (HxD)
2134.0 x 610 x 610
Net weight (kg)
167.000
Connection Rating (W)
300
Current (A)
10
Interior ventilator
No
Voltage (V)
220-240
Frequency (Hz)
50-60
Approval certificates
CE, VDE
Length electrical supply cord (cm)
300
Plug type
Gardy plug w/ earthing
Energy consumption (kWh/d) winecooler
0.47
Energy consumption per Year (kWh/a) winecooler
170.5
Total unit gross capacity (l)
441
Number of compressors
1
Number of independent cooling systems
1
Reversible Door Hinge
Yes
Interior light switch
No
EAN code
4242006262242

Consumption and connection features

Brand
Gaggenau
Product name / Commercial code
RW466364
Product category
Energy efficiency class (2010/30/EC)
A
Energy consumption annual (kWh/annum)
171.00
Capacity in 0.75l (bordeaux bottles)
99
Climate class
SN-T
Noise level (dB)
42
2020-09-10
Page 1

RW466364


Vario wine climate cabinet 400 series

Fully integrated, with glass door

Niche width 61 cm, Niche height 213.4 cm



2020-09-10

Page 2

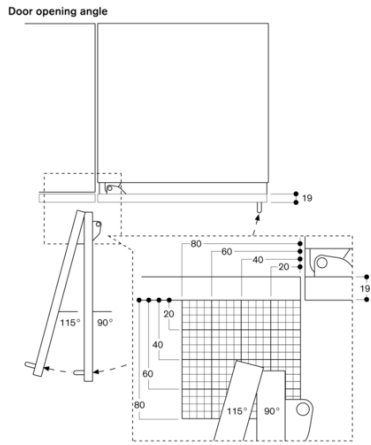


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

Bottle storage

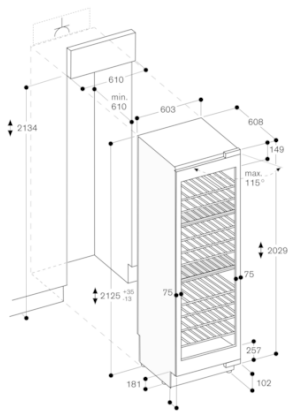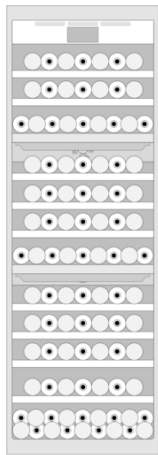


The maximum door panel dimensions are based on a clearance of 3 mm.

Base detail

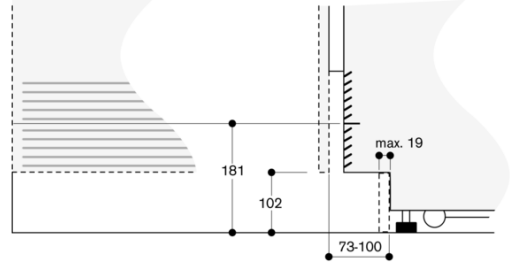

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

Wall clearance RB 472/RC/RF/RW

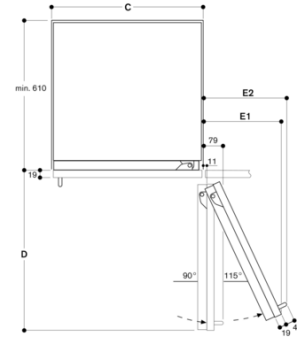

Recess width C	D	E1	E2
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

